

LED UK

Alert Bulkhead


The Alert LED Bulkhead has an IP65 rating allowing it to be used in a diversity of areas. The optional 3 hour maintained emergency facility delivers test functionality via the press of a button. An optional integral sensor offers energy savings by switching the fitting off during absence or switching off when enough ambient daylight availability is available.

- LED light source
- IP65
- Polycarbonate prismatic diffuser
- 3 Hours emergency (Maintained)
- No UV, no infrared, no other Hazardous Substances
- No noise, no flicker, resistance from vibration
- CE & ROHS compliant



General

Dimensions	390 x 110 x 90mm
Weight	2.4kg
Beam Angle	120°
Installation	Ceiling/Wall Mounted
Voltage	220-240V50/60Hz
Certification	CE, ROHS
Warranty	3 Years

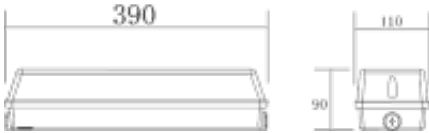

Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	8 W 14 W
Exit Lumens	680 lm 1,300 lm
Efficiency	85.0 ll/cW 92.8 ll/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Carbon Allowance) SKA Rating

Emergency

Type	Maintained
Battery (high temperature)	Ni-MH or Li-ion Battery
Emergency Output	30%
Emergency Duration	3hrs
Charge Time	12 hours

Sensor

Alert Bulkhead

Sensor Range	180°, min 1m, max 8m (adjustable)
Sensor Time	10 sec - 30 min max (adjustable)
Sensor Interval Output	25% nominal power

Available options

Wattage	8 W - 680 lm, 14W - 1,300 lm
Colour	3000K, 4000K, 6000K
Sensor	Not Required, Microwave Sensor
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming, Mains Dimming, Switch Dimming, PWM Dimming
Emergency	Not Required, 3 Hour Facility , 3 Hour Self Test, 3 Hour Central Test

Product Code: ALR