

LED UK

Atlantis

The Atlantis LED is a linear vapour-proof luminaire which is available in lengths of 662mm, 1272mm & 1575mm. The luminaire body is constructed from GRP and ABS which houses the singular LED board. The polycarbonate lens is retained via a series of clips to ensure an IP66 rated seal. The lens is part frosted to eliminate glare from all viewing angles. The Atlantis is available with a variety of Emergency options including Central Battery System.



- IP66 rated
- 600/1200/1500mm modules
- 5 year warranty
- 50,000 hours
- Built-in surge protection
- Built-in thermal protection
- Maintenance free
- Mercury free, No UV or IR
- Instant start and flicker free
- Patented multi-function design

General

Dimensions	20/40W	662 x 158 x 100mm
	40/50W	1272 x 158 x 100mm
	50/60W	1575 x 158 x 100mm
Weight	1.9kg	600mm Module
	3.7kg	1200mm Module
	4.5kg	1500mm Module
Installation	Ceiling Surface	
	Ceiling Suspended	
	Wall Surface	
Voltage	100-240Vac 50/60Hz	
Certification	SAA, TUV, CE, GS, CB, ERP	
Warranty	5 Years	

Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	23.5 W
	33.5 W
	40.0 W
	44.5 W
	54.5 W
	64.5 W
Exit Lumens	1811 lm
	2686 lm
	4000 lm
	3875 lm
	4529 lm
	4550 lm
	5505 lm

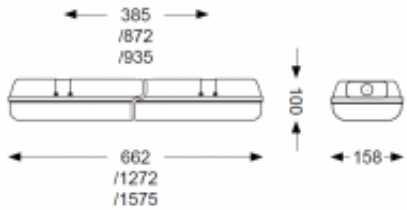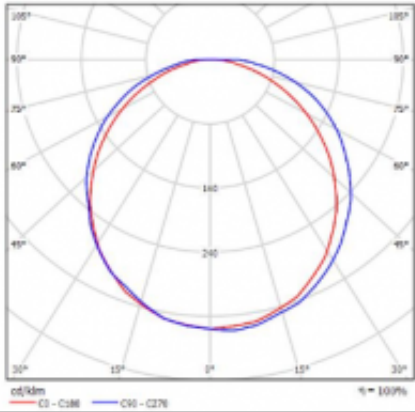

Efficiency	77.1 lm/cW
	80.2 lm/cW
	100 lm/cW
	87.1 lm/cW
	83.1 lm/cW
	85.3 lm/cW
Compliance	Building Regulations
	ETL (Energy Technology List)
	ECA (Enhanced Capital Allowance)
	SKA Rating

Available options

Wattage	20W (600mm Module), 30W (600mm Module), 40W (600mm Module), 40W (1200mm Module), 50W (1200mm Module), 50W (1500mm Module), 60W (1500mm Module)
Colour Temperature	4000K, 6000K, Red, Green, Blue, RGB
Mounting Option	Surface, Suspended
Sensor	Not Required, Microwave Sensor
Connector	IP66 Cable Gland, IP68 Connector
Emergency	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: ATL