


LED UK

Brite + 300 x 1200


300 x 1200 lay in, back lit, recessed LED Modular with opal diffuser which as part of the Brite Range, compliments the 600 x 600 and 300 x 300 LED Brite + Modular fittings . The luminaire is designed for lift and tilt installation onto a 15mm Tee Grid or a 24mm Tee Grid. The Brite 300 x 1200 lay in modular fitting is also suitable for an offer up installation into a plasterboard ceiling. The Brite 300x1200mm LED panel light is an environmentally friendly LED solution assembled from injection moulded ABS. The diffuser is constructed from high efficiency PMMA which provides a highly uniformed, low glare and dot free distribution of light.

- Architectural appearance - screwless smooth bezel
- Advanced design - Injection moulded PMMA body
- High transmittant frosted lens
- Instant on - no flicker
- Lift and tilt or offer up installation
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span



General

Dimensions	295 x 1195 x 42mm
Weight	2.7kg
Installation	Recessed 24mm T-Grid Recessed Burgess Recessed Plasterboard
Voltage	85-265Vac 50/60Hz
Certification	SAA, TUV, CE, GS, CB, ERP
Warranty	5 Years

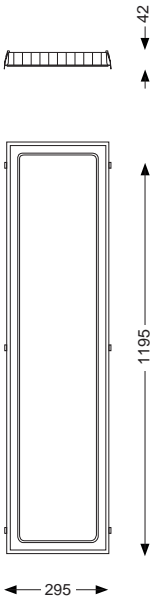

Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	28.9 W
Exit Lumens	3525 lm
Efficiency	122.3 ll/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

Available options

Size	300 x 1200mm
Colour Temperature	3000K, 4000K, 6000K
Mounting Option	Lift and tilt, Offer up
Dimming	Fixed output, 1-10V Dimming, DALI Dimming, Mains Dimming, Switch Dimming, DSI Dimming
Emergency	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: BRP