

LED UK

Guardian


A stylish and compact IP65 rated 3 Watt LED luminaire suitable for mounting in a number of different applications. The fitting is available in either a switchable maintained, non-maintained or as DALI self-test non-maintained. This fitting is not only more compact than a majority of LED bulkheads, but offers an impressive 350 delivered lumen output.

- ABS Body & Polycarbonate lens
- IP65 Rated
- Maintained / Non-maintained
- No RF and electronic magnetic interference
- Over 35,000 hours life span



General

| | |
|---------------|---------------------------------|
| Dimensions | 276 x 143 x 44mm |
| Weight | 0.72kg |
| Installation | Ceiling Surface Wall Surface |
| Voltage | 90-240Vac |
| Certification | CE, ROHS |
| Warranty | 3 Years |

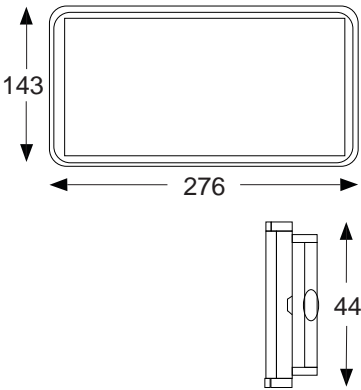

Emergency

| | |
|----------------|--------------------|
| Battery | Ni-Cd 4.8V 1500mAh |
| Charge Time | 24 hours |
| Discharge Time | 180 minutes |

Performance

| | |
|------------------|----------------------|
| Colour Rendering | Ra>80 |
| Longevity | 35,000 hours |
| System Power | 5 W |
| Exit Lumens | 350 lm |
| Compliance | Building Regulations |

Available options

| | |
|--------------------|---|
| Wattage | 3W |
| Colour Temperature | 6000K |
| Operation Mode | Maintained, Non-Maintained, 3 HOur Central Test |

Product Code: GRN