

LED UK

Modus



The Modus LED modular 600x600mm is a panel luminaire ideal for wet areas due to its IP65 rating front sealed panel. The body is constructed from powder coated steel with white painted aluminium extruded lens and uses a high efficiency PMMA diffuser. The silicon gasket on the frame seals the product to IP65 making the fitting ideal for IP rated ceilings. The product is powered by four LED boards producing an efficiency of up to 90lm/cW with a lifespan of over 50,000 hours.

- IP65 front sealed panel
- High transmittant frosted diffuser
- White powdercoat finish
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span



General

Dimensions	595 x 595 x 75mm
	598 x 598 x 75mm
Weight	5.2kg
Installation	Recessed SAS120
Voltage	220-240Vac 50/60Hz
Certification	SAA, TUV, CE, GS, CB, ERP
Warranty	5 Years

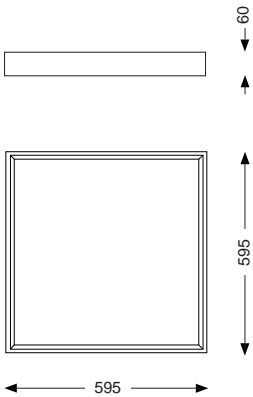

Performance

Front Panel IP Rating	IP65
Rear Containment IP Rating	IP20
Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	42.1W 52.0W
Exit Lumens	3715lm 5270lm
Efficiency	88.2 lm/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

Available options

Wattage	40W - 3700 lm, 52W - 5270 lm
Colour Temperature	3000K, 4000K, 6500K
Mounting Option	Lift and tilt, Offer up
Dimming	Fixed output, 1-10V Dimming, DALI Dimming, Switch Dimming
Emergency	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: MDS