

# LED UK

## Slot Mini

The Slot Mini LED is a recessed 65mm wide (48mm diffuser) continuous luminaire ranging in length from 574mm up to sections of 4488mm. The Slot has a micro trim bezel which gives a minimalist appearance in the ceiling which makes it ideal for architectural spaces. The fitting is made from extruded aluminium with a polycarbonate diffuser to achieve a highly efficient linear profile with integral gear. Slot Mini is available with 90 Degree Corners and Tee Connectors providing further design capability.



- Aluminium body
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span


### General

#### Dimensions

Ranging From

65 x 32 x 574mm-  
65 x 32 x 4,488mm  
Recessed  
100-240Vac 50/60Hz  
CE, ROHS  
5 Years

Installation  
Voltage  
Certification  
Warranty

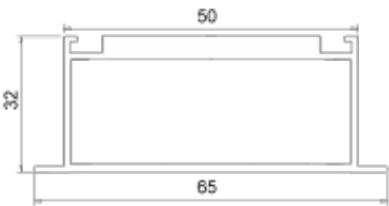

### Performance

Colour Rendering  
MacAdam Ellipse  
UGR  
System Power

Ra>80  
3 Step  
<19  
Ranging From

#### Exit Lumens

15.07 W-  
120.56 W  
Ranging From

Efficiency  
Longevity  
Compliance

1,718 lm-  
13,738 lm  
~125.6 ll/cW  
L90 / B10 @ 50,000 hours  
Building Regulations  
ETL (Energy Technology List)  
ECA (Enhanced Capital Allowance)  
SKA Rating

Available options

Length	400mm - 10.4W - 708lm, 500mm - 13.0W - 885lm, 600mm - 15.6W - 1062lm, 700mm -18.2W - 1240lm, 800mm - 20.8W - 1417lm, 900mm - 23.4W - 1594lm, 1,000mm -26.0W - 1771lm, 1,100mm - 28.6W - 1948lm, 1,200mm - 31.2W - 2125lm, 1,300mm - 33.8W - 2302lm, 1,400mm - 36.4W - 2479lm, 1,500mm - 39.0W - 2656lm, 1,600mm - 41.6W - 2834lm, 1,700mm - 44.2W - 3011lm, 1,800mm - 46.8W - 3188lm, 1,900mm - 49.4W - 3365lm, 2,000mm - 52.0W - 3542lm, 2,100mm - 54.6W - 3719lm, 2,200mm - 57.2W - 3896lm, 2,300mm - 59.8W - 4073lm, 2,400mm - 62.4W - 4250lm, 2,500mm - 65.0W - 4427lm
Module	Standalone, Start, Middle, End, Special
Profile Colour	Aluminium, White, Special Colour (Available on Request)
Colour Temperature	3000K, 4000K, 5000K, 6000K
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming, Switch Dimming
Emergency	Not Required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: SLT-M-RCD