

LED UK

Trend Spike Excell

Trend Spike Architectural Spot Light is a surface mounted luminaire with an IP65 rating. The luminaire is constructed from Die Cast Aluminium and is available in varied wattages. Fitting is available in varied beam angles and LED colours. Fitting is supplied with an inground mounting spike and LED drivers are mounted integrally to the fitting body.

- IP65 Rated
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span




General

Dimensions	150mm Diameter x 270mm Height
Weight	3.2 kg
Installation	Spike Mounted
Voltage	120-277Vac
Operating Temperature	-30° + 55°C
Certification	CE, ROHS
Warranty	5 Years

Performance

Colour Rendering	Ra>82
Longevity	50,000 hours
System Power	42W
Exit Lumens	4100 Lm
Beam Angles	15°/24°/36°
Efficiency	91.91 l/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

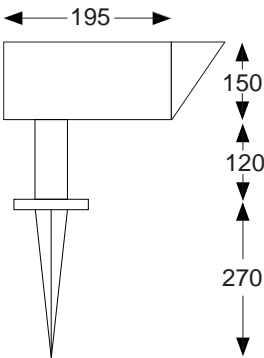

Available options

Wattage	42W
Beam Angle	15°, 24°, 36°
Colour Temperature	3000K, 4000K
Dimming	Fixed Output

Product Code: TRX-SPK