

LED UK


Vista 1230

Vista 1230 is a 1200 x 300 side lit LED Modular with opal diffuser. The luminaire is designed for either lift and tilt installation onto a 15mm or a 24mm Tee Grid, suspended using suspension kits or surface mounting with the use of a specially designed surface mounted frame. The Vista LED panel light is an environmentally friendly LED solution assembled from aluminium and a high efficiency PMMA diffuser which provides a uniformed, low glare and dot free distribution of light.

- High transmittant opal lens
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span
- Remote LED Driver

General

Dimensions	1195 x 295 x 10mm
Weight	3.0kg
Installation	Recessed 16 or 24mm T-Grid
Voltage	85-265Vac 50/60Hz
Certification	SAA, TUV, CE, GS, CB, ERP
Warranty	5 Years
IP Rating	IP40

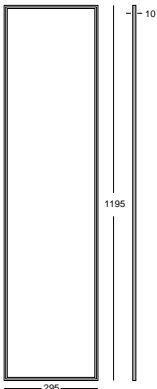

Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	40.0 W
Lumens	4000 lm
Efficiency	100.00 ll/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

Available options

Colour Temperature	3000K, 4000K, 6000K
Mounting Option	Lift and tilt, Suspended, Surface
Dimming	Fixed output, 1-10V Dimming, DALI Dimming, Mains Dimming, Switch Dimming
Emergency	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: VTA-1230