




- Seamless Mosaic Technology - Picture of high uniformity without gaps and information missing, ensuring real seamless mosaic effect
- Intelligent Brightness Self-adjusting System Brightness of the screens can be adjusted intelligently according to the ambient light level
- Real and Natural Colour - Leading calibration technology is applied with advanced color reproduction function to offer a real and natural color that is completely complied with human eyes' visual habit.
- Large Viewing Angle - Broad viewing angle up to 140°, bringing a larger visible viewing area
- LCD Intelligent Control - Intelligent Control, indicating the exact accumulated working hours and temperature of cabinet

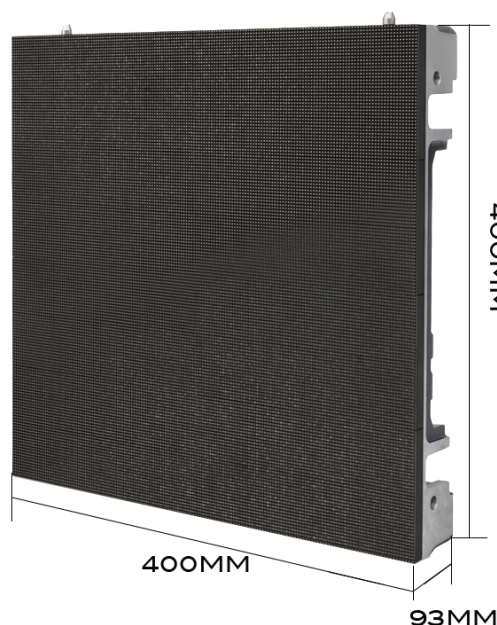

| Item                        |  | Parameters                |                        |                        |                        |
|-----------------------------|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Modules</b>              | Model                                  | <b>LED-CI-1.923S</b>      | <b>LED-CI-2.5S</b>     | <b>LED-CI-2.7S</b>     | <b>LED-CI-3.125S</b>   |
|                             | Pixel Pitch (mm)                       | 1.923                     | 2.5                    | 2.7                    | 3.125                  |
|                             | Physical Density (dot/m <sup>2</sup> ) | 269,441                   | 160,000                | 129,673                | 102,400                |
|                             | LED Configuration                      | 1R1G1B                    | 1R1G1B                 | 1R1G1B                 | 1R1G1B                 |
|                             | Module Size (mm x mm)                  | 200 x100                  | 200 x100               | 200 x100               | 200 x100               |
|                             | Module Resolution (PX x PX)            | 104 x 52                  | 80 x 40                | 72 x 36                | 64 x 32                |
|                             | Cabinet Power Consumption (w)          | 25                        | 25                     | 25                     | 25                     |
| <b>Technical Parameters</b> | Drive Mode                             | Constant Current Drive    | Constant Current Drive | Constant Current Drive | Constant Current Drive |
|                             | Horizontal Viewing Angle (Deg)         | 140                       | 140                    | 140                    | 140                    |
|                             | Vertical Viewing Angle (Deg)           | 140                       | 140                    | 140                    | 140                    |
|                             | Brightness (cd/m <sup>2</sup> )        | 900                       | 900                    | 900                    | 900                    |
|                             | Grey Scale                             | 14 Bit                    | 14 Bit                 | 14 Bit                 | 14 Bit                 |
|                             | Refresh Rate (Hz)                      | >1400                     | >1600                  | >1600                  | >1600                  |
|                             | Cabinet Resolution (PX xPX)            | 208 x 208                 | 160 x 160              | 144 x 144              | 128 x 128              |
|                             | Cabinet Max Power Consumption (w)      | 300                       | 300                    | 300                    | 300                    |
|                             | Cabinet Avg Power Consumption (w)      | 80                        | 80                     | 80                     | 80                     |
|                             | Cabinet Size (mm x mm)                 | 400 x 400                 | 400 x 400              | 400 x 400              | 400 x 400              |
|                             | Cabinet Thickness (mm)                 | 93                        | 93                     | 93                     | 93                     |
|                             | Cabinet Material                       | Aluminium                 |                        |                        |                        |
|                             | Colour                                 | 281tn                     |                        |                        |                        |
|                             | Input Voltage (v)                      | 96-264(VAC)               |                        |                        |                        |
|                             | Protection Level                       | IP43                      |                        |                        |                        |
|                             | Refresh Frame Frequency (hz)           | 50-60                     |                        |                        |                        |
|                             | Working Environment                    | Indoor                    |                        |                        |                        |
|                             | Working Temperature (°C)               | -20°C ~ +40°C (operating) |                        |                        |                        |
|                             | Operation Humidity (RH)                | 10% ~ 85% (operating)     |                        |                        |                        |
|                             | Life Span (H)                          | 100,000 hrs               |                        |                        |                        |
| Certificates                | CCC CE                                 |                           |                        |                        |                        |