

LED UK

Corona Mini Adjustable


The Corona Mini adjustable LED downlight has an 85mm diameter bezel whilst using a CREE LED engine. The heatsink is constructed from die-cast aluminium complete with an adjustable aluminium bezel and reflector. The bezel features a recess detail creating a glare friendly cut-off which is also an aesthetically pleasing architectural detail. The Corona Mini is available in a 780lm output with 15°, 24° and 30° beam angles.

- CREE LED Engine
- Cast Aluminium
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span



General

Dimensions	Ø85 x 84mm
Cutout	Ø75mm
Weight	0.2kg
Installation	Ceiling Tile Plasterboard
Voltage	220-240Vac
Certification	CE, ROHS
Warranty	5 Years

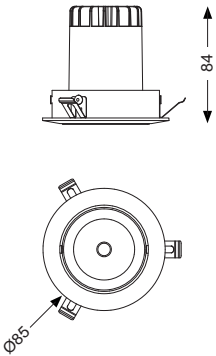

Performance

Colour Rendering	Ra>82
Longevity	50,000 hours
System Power	10 W
Exit Lumens	780 lm
Efficiency	78 lm/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

LED UK

Corona Mini Adjustable

Available options

Wattage	10W - 700 lm
Colour	White, Special RAL Colour
Colour Temperature	3000K, 4000K, 5000K
Beam Angle	15° Beam, 24° Beam, 36° Beam
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming, Mains Dimming, Switch Dimming
Emergency	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test

Product Code: COR-M-A