


The Estrada LED modular 300x1200mm luminaire has an opal curved central polycarbonate diffuser which uses butterfly reflectors to get a uniform spread of light. The body is made from powder coated steel finished in white with all gear being housed internally The luminaire is powered by two Philips LED boards allowing the product to achieve an efficiency of up to 90lm/cW with a lifespan of over 50,000 hours.

- High transmittant frosted diffuser
- White powdercoat finish
- Philips Fortimo LED boards
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span




General

Dimensions	1196 x 296 x 70mm
Weight	4.7kg
Installation	Recessed 24mm T-Grid Recessed Burgess
Voltage	220-240Vac 50/60Hz
Certification	SAA, TUV, CE, GS, CB, ERP
Warranty	5 Years



Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	44.2 W 52.2 W
Exit Lumens	3344 lm 3806 lm
Efficiency	75.7 lm/cW 72.9 lm/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

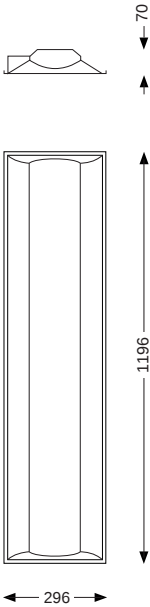

Available options

Wattage	40W - 3300 lm, 48W - 3800 lm
Colour Temperature	3000K, 4000K, 6500K
Mounting Option	Lift and tilt, Offer up
Dimming	Fixed output, 1-10V Dimming, DALI Dimming, Switch Dimming
Emergency	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: EDA