
Hyperion

The Hyperion is a 100 x 100 x 170mm surface mounted downlight using CREE XP-E LED engines. The bezel has a deep recess detail creating a glare friendly cut-off which is also an aesthetically pleasing architectural detail. This product is ideal for conference rooms and meeting rooms.

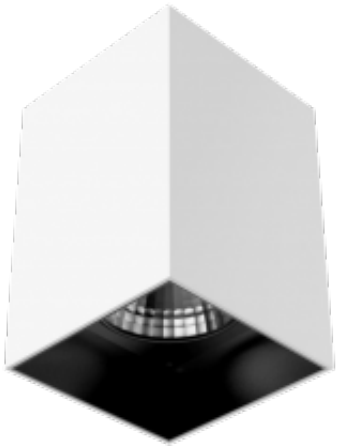

- CREE XP-E LED Array
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span

General

Dimensions	100 x 100 x 170mm
Installation	Surface Mounted
Voltage	220-240 Vac
Certification	CE, ROHS
Warranty	5 Years

Performance

Colour Rendering		Ra>82
Longevity		L80 / B20 @ 50,000 hours
UGR		<19
MacAdam Ellipse		3 Step
System Power		15W
		20W
		25W
Exit Lumens	1380 lm	
	1610 lm	
	1870 lm	
Efficiency	92.00 ll/cW	
	80.50 ll/cW	
	74.80 ll/cW	
Compliance	Building Regulations	
	ETL (Energy Technology List)	
	ECA (Enhanced Capital Allowance)	
	SKA Rating	

LED UK

Hyperion

Available options

Wattage	15W, 20W, 25W
Colour	White, Special RAL Colour
Colour Temperature	2700K, 3000K, 4000K
Beam Angle	15°, 24°, 36°, 60°
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming, Mains Dimming, Switch Dimming
Emergency	Not Required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test

Product Code: HYP