# Iris Lid

The Iris Lid is a surface wall mounted IP65 rated luminaire. The luminaire has an eyelid cover giving a stylish look whilst reducing indirect light distribution.

- Cast Aluminium
- IP65 rated
- IK10 rated
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span

## General

| | |
|---|---|
| **Dimensions** | Ø275 x 90mm |
| **Installation** | Surface/Wall Mounted |
| **Voltage** | 85-265Vac |
| **Certification** | CE, ROHS |
| **Warranty** | 5 Years |

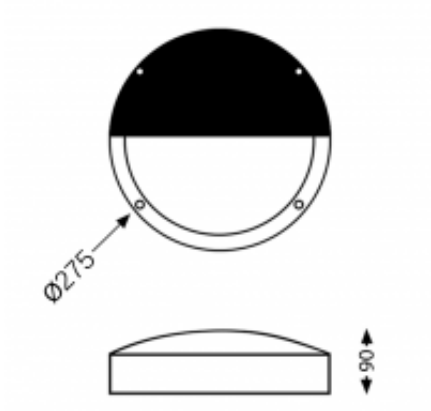


## Performance

| | |
|---|---|
| **Colour Rendering** | Ra>80 |
| **Longevity** | 50,000 hours |
| **System Power** | 15W / 20W |
| **Exit Lumens** | 1350lm / 1800lm |
| **Efficiency** | 90 lm/W |
| **Compliance** | Building Regulations<br>ETL (Energy Technology List)<br>ECA (Enhanced Capital Allowance)<br>SKA Rating |

## Available options

| | |
|---|---|
| **Wattage** | 15W - 1200Lm, 20W - 1600Lm |
| **Colour Temperature** | 3000K, 4000K, 6000K |
| **Body** | White Painted Finish, Black Painted Finish |
| **Microwave Sensor** | Not Required, Microwave Sensor |
| **Dimming** | Fixed Output, 1-10V Dimming, DALI Dimming, Switch Dimming |
| **Emergency** | Not Required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, 3 Hour Central Battery |

**Product Code: IRL**