
Roundex Surface




Roundex Surface is a 20mm diameter surface mounted continuous extrusion luminaire available in 1000mm to 5000mm linear lengths or as a prepared bespoke fitting for your project requirements. Roundex is supplied with a whole bodied opal or frosted diffuser which makes it ideal for both direct and indirect light distribution.. The Roundex opal diffuser provides a dot free appearance across all wattages making the fitting suitable to be on display as an architectural feature. Roundex is available as fixed output, dimmable or colour changing RGB.

- Opal or Frosted polycarbonate diffuser
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span
- Supplied with Remote LED Driver
- Supplied with end caps & flying lead

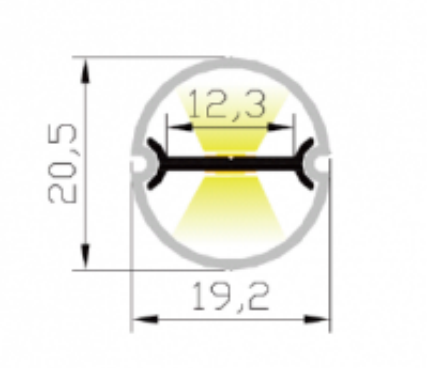

General

Dimensions	20mm Diameter
Weight	0.5 kg per metre
Beam Angle	90°
Installation	Surface Mounted
Voltage	220-240Vac
Certification	CE, ROHS
Warranty	5 Years

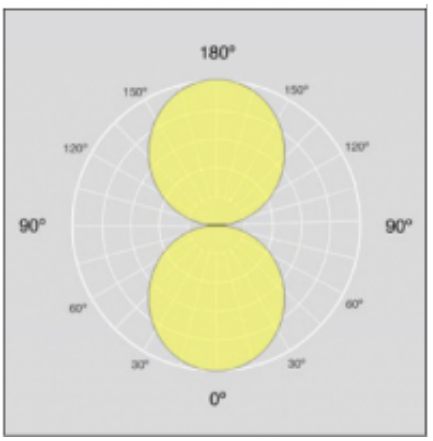

Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	5.0 W 7.2 W 9.0 W 15.0 W
Lumens	490 lm 750 lm 950 lm 1350 lm
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

LED UK

Roundex Surface

Available options

Length	1000mm, 2000mm, 3000mm, 4000mm, Bespoke
Colour Temperature	2700K, 3000K, 4000K, 6000K, RGB, RGBW
Diffuser	Opal, Frosted
Wattage	5W, 7.2W, 9W, 15W
Dimming	Fixed Output, 1-10V Dimming, DALI Dimmable, Mains Dimming, Switch Dimming, DMX

Product Code: RDX-SFC