

# LED UK

## Roundex Surface

Roundex Surface is a 20mm diameter surface mounted continuous extrusion luminaire available in 1000mm to 5000mm linear lengths or as a prepared bespoke fitting for your project requirements. Roundex is supplied with a whole bodied opal or frosted diffuser which makes it ideal for both direct and indirect light distribution.. The Roundex opal diffuser provides a dot free appearance across all wattages making the fitting suitable to be on display as an architectural feature. Roundex is available as fixed output, dimmable or colour changing RGB.



- Opal or Frosted polycarbonate diffuser
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span
- Supplied with Remote LED Driver
- Supplied with end caps & flying lead

### General

Dimensions	20mm Diameter
Weight	0.5 kg per metre
Beam Angle	90°
Installation	Surface Mounted
Voltage	220-240Vac
Certification	CE, ROHS
Warranty	5 Years

### Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	5.0 W 7.2 W 9.0 W 15.0 W
Lumens	490 lm 750 lm 950 lm 1350 lm
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

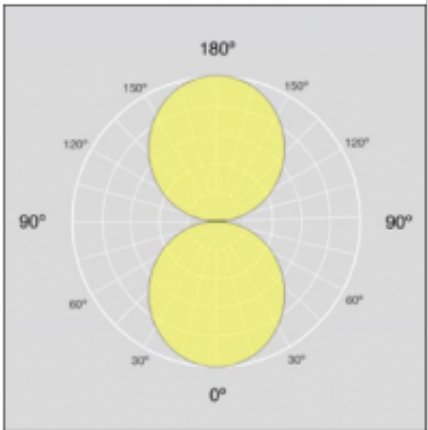

# LED UK

## Roundex Surface

---

### Available options

Length	1000mm, 2000mm, 3000mm, 4000mm, Bespoke
Colour Temperature	2700K, 3000K, 4000K, 6000K, RGB, RGBW
Diffuser	Opal, Frosted
Wattage	5W, 7.2W, 9W, 15W
Dimming	Fixed Output, 1-10V Dimming, DALI Dimmable, Mains Dimming, Switch Dimming, DMX

Product Code: RDX-SFC