


LED UK

Slot



The Slot LED is a recessed 90mm wide (72mm diffuser) continuous luminaire available in from 400mm up to sections 2500mm. The Slot has a micro trim bezel which gives a minimalist appearance in the ceiling which makes it ideal for architectural spaces. The fitting is made from extruded aluminium with a polycarbonate diffuser to achieve a highly efficient linear profile with integral gear.

- Aluminium body
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span

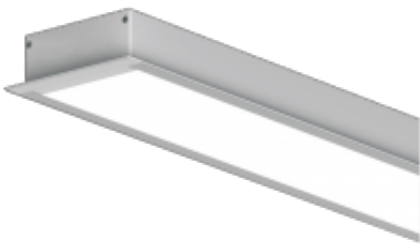

General

Dimensions	90 x 35 x 400mm
	90 x 35 x 600mm
	90 x 35 x 900mm
	90 x 35 x 1200mm
	90 x 35 x 1500mm
	90 x 35 x 1800mm
	90 x 35 x 2100mm
	90 x 35 x 2400mm
Weight	1.7kg
	3.4kg
	5.1kg
	6.25kg
	7.95kg
	9.65kg
	11.35kg
	13.5kg
Installation	Recessed
Cutout	75mm
Certification	CE, ROHS
Warranty	5 Years
Rating	IP40

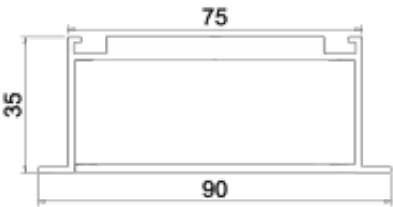

Performance

Colour Rendering	Ra>80
MacAdam Ellipse	3 Step
Longevity	L80 / B20 @ 50,000 hours
System Power	7.6 W
	15.2 W
	22.8 W
	30.4 W
	38.0 W
	45.5 W
	53.1 W
	60.7 W
Luminous Flux	858 lm

	1,716 lm
	2,574 lm
	3,432 lm
	4,290 lm
	5,148 lm
	6,006 lm
	6,864 lm
Efficiency	113.0 lm/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

Available options

Length	400mm - 10.4W - 708lm, 500mm - 13.0W - 885lm, 600mm - 15.6W - 1062lm, 700mm -18.2W - 1240lm, 800mm - 20.8W - 1417lm, 900mm - 23.4W - 1594lm, 1,000mm -26.0W - 1771lm, 1,100mm - 28.6W - 1948lm, 1,200mm - 31.2W - 2125lm, 1,300mm - 33.8W - 2302lm, 1,400mm - 36.4W - 2479lm, 1,500mm - 39.0W - 2656lm, 1,600mm - 41.6W - 2834lm, 1,700mm - 44.2W - 3011lm, 1,800mm - 46.8W - 3188lm, 1,900mm - 49.4W - 3365lm, 2,000mm - 52.0W - 3542lm, 2,100mm - 54.6W - 3719lm, 2,200mm - 57.2W - 3896lm, 2,300mm - 59.8W - 4073lm, 2,400mm - 62.4W - 4250lm, 2,500mm - 65.0W - 4427lm
Module	Standalone, Start, Middle, End, Special
Profile Colour	Aluminium, White, Special Colour (Available on Request)
Colour Temperature	3000K, 4000K, 5000K, 6000K
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming, Switch Dimming
Emergency	Not Required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: SLT