


The Tallex LED is a 140mm diameter downlight which uses a CREE XPE engine. The heatsink is constructed from die-cast aluminium complete with aluminium bezel and reflector. The bezel features a 40mm recess detail creating a glare friendly cut-off which is also an aesthetically pleasing architectural detail. The Tallex is available in 975 lm and 1300 lm outputs with 15°, 24°, 30°, 36° or 60° beam angles. The Tallex has a 30° tilt range for flexibility.

- CREE LED Engine
- Cast Aluminium
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span




General

Dimensions	Ø140 x 117mm
Cutout	Ø120mm
Weight	0.56kg
Installation	Ceiling Tile Plasterboard
Voltage	220-240Vac
Certification	CE, ROHS
Warranty	5 Years

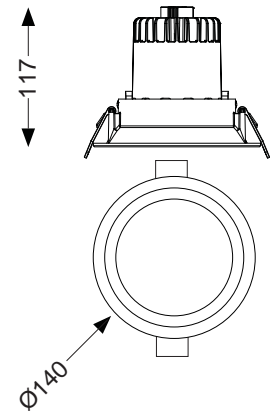

Performance

Colour Rendering	Ra>82
Longevity	50,000 hours
System Power	15 W 20 W
Exit Lumens	975 lm 1300 lm
Efficiency	65 lm/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating



Available options

Wattage	15W - 975 lm, 20W - 1300 lm
Colour	White, Special RAL Colour
Colour Temperature	2700K, 3000K, 4000K, 5000K
Beam Angle	15° Beam, 24° Beam, 30° Beam, 36° Beam, 60° Beam
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming, Mains Dimming, Switch Dimming
Emergency	Not Required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test

Product Code: TLX-S