


## Tegra 372x1394


The Tegra LED panel is a bespoke modular luminaire designed to fit SAS330 ceilings. The body is made from powder coated steel giving a screwless appearance from under the ceiling. The diffuser is made from high efficiency PMMA which gives the luminaire optimum performance. The Tegra has a lifespan of over 50,000 hours and produces an efficacy of 114 lm/W.

- Architectural appearance - screwless smooth bezel
- High transmittant opal lens
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span

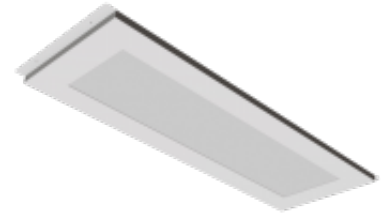


### General

<b>Dimensions</b>	372 x 1394 x 75mm
<b>Weight</b>	7.5 kg
<b>Installation</b>	SAS330 Ceiling
<b>Finish</b>	Sheet Steel (RAL 9010)
<b>Diffuser</b>	High Transmission PMMA Opal
<b>Voltage</b>	220-240Vac 50/60Hz
<b>Warranty</b>	5 Years



### Performance

<b>Colour Rendering</b>	Ra>80
<b>MacAdam Ellipse</b>	3 Step
<b>UGR</b>	<19
<b>System Power</b>	36.2 W
<b>Exit Lumens</b>	4112 lm
<b>Efficiency</b>	113.6 lm/cW
<b>Longevity</b>	L90 / B10 @ 50,000 hours
<b>Compliance</b>	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating



### Available options

<b>Tegulation</b>	30mm Tegulation
<b>Air Handling</b>	Not Required, 10 litres/Second, 20 litres/Second, 30 litres/Second, 40 litres/Second
<b>Gearbox</b>	Integral, Remote, Integral GST Panel Plug, Remote GST Panel Plug, Integral with Special Flying Lead, Remote with Special Flying Lead
<b>Colour Temperature</b>	3000K, 4000K, 5000K
<b>Gasket</b>	Not Required, Gasket 1 Side, Gasket 2 Side, Gasket 3 Side, Gasket 4 Side
<b>Dimming</b>	Fixed output, 1-10V Dimming, DALI Dimming, Switch Dimming
<b>Emergency</b>	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

**Product Code: TEG-8-372X1394**