

# LED UK

## Trend Spike


Trend Spike Architectural Spot Light is a surface mounted luminaire with an IP65 rating. The luminaire is constructed from Die Cast Aluminium and is available in varied wattages. Fitting is available in varied beam angles and LED colours. Fitting is supplied with an inground mounting spike and LED drivers are mounted integrally to the fitting body.



- IP65 Rated
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span
- Integral Mounted LED Driver

### General

Dimensions	90mm Diameter x 180mm Height
Weight	1.7 Kg
Installation	Spike Mounted
Voltage	120-277Vac
Operating Temperature	-30° + 55°C
Certification	CE, ROHS
Warranty	5 Years

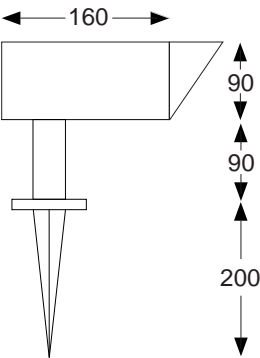

### Performance

Colour Rendering	Ra>82
Longevity	50,000 hours
System Power	15W 20W
Exit Lumens	1378 Lm 1838 Lm
Beam Angles	15°/24°/36°
Efficiency	91.91 l/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

### Available options

Wattage	15W, 20W
Beam Angle	15°, 24°, 36°
Colour Temperature	3000K, 4000K
Dimming	Fixed Output

Product Code: TRD-SPK