

# Vector Suspended

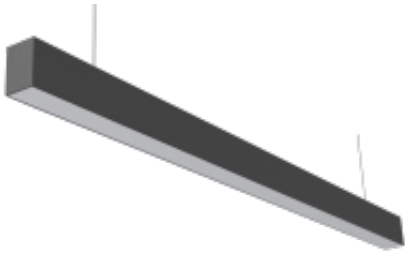


The Vector Suspended LED is a continuous suspended linear luminaire available in lengths ranging from 574mm to 4488mm. The luminaire can also be used as a system product with optional joining kits and corner pieces. Please contact us for a bespoke solution. The fitting is made from extruded aluminium with a (Tpa) Lens to achieve a highly efficient linear profile with integral gear. The profile as has the option to have a high or low output uplight kit to illuminate ceilings. The Vector is also available with an integrated emergency kit.


- Continuous aluminium profile
- Linkable modules
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span



## General

| | |
|---|---|
| **Dimensions** | Ranging From<br><br>60 x 90 x 574mm-<br>60 x 90 x 4,488mm |
| **Installation** | Suspended |
| **Voltage** | 100-240Vac 50/60Hz |
| **Certification** | CE, ROHS |
| **Warranty** | 5 Years |


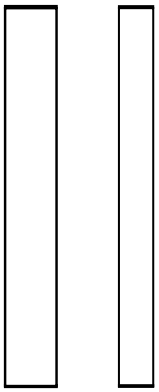
## Performance

| | |
|---|---|
| **Colour Rendering** | Ra>85 |
| **MacAdam Ellipse** | 3 Step |
| **UGR** | <19 |
| **System Power** | Ranging From<br><br>15.07 W-<br>120.56 W |
| **Exit Lumens** | Ranging From<br><br>1,718 lm-<br>13,738 lm |
| **Efficiency** | ~125.6 ll/cW |
| **Longevity** | L90 / B10 @ 50,000 hours |
| **Compliance** | Building Regulations<br>ETL (Energy Technology List)<br>ECA (Enhanced Capital Allowance)<br>SKA Rating |

LED UK

# Vector Suspended

## Available options

| | |
|---|---|
| **Standalone Size** | 574mm - 1,718lm - 12W, 714mm - 2,141lm - 15W, 854mm - 2,609lm - 18W, 993mm - 3,032lm - 21W, 1,133mm - 3,435lm - 24W, 1,273mm - 3,858lm - 27W, 1,412mm - 4,326lm - 30W, 1,552mm - 4,749lm - 33W, 1,692mm - 5,152lm - 36W, 1,832mm - 5,575lm - 39W, 1,971mm - 6,043lm - 42W, 2,111mm - 6,466lm - 45W, 2,251mm - 6,869lm - 48W, 2,391mm - 7,292lm - 51W, 2,530mm - 7,760lm - 54W, 2,670mm - 8,183lm - 57W, 2,810mm - 8,586lm - 60W, 2,950mm - 9,009lm - 63W, 3,090mm - 9,477lm - 66W, 3,230mm - 9,900lm - 68W, 3,370mm - 10,304lm - 73W, 3,510mm - 10,727lm - 75W, 3,649mm - 11,195lm - 79W, 3,789mm - 11,618lm - 81W, 3,929mm - 12,021lm - 84W, 4,069mm - 12,444lm - 87W, 4,208mm - 12,912lm - 90W, 4,348mm - 13,335lm - 93W, 4,488mm - 13,738lm - 96W, Bespoke Size |
| **Module** | Standalone, Start, Middle, End, Special |
| **Uplight** | No Uplight , Uplight (Low Output), Uplight (High Ouput), Uplight (Standard Output) |
| **Profile Colour** | Aluminium, Special RAL Colour |
| **Colour Temperature** | 3000K, 4000K, 5000K, Red, Green, Blue, RGB |
| **Dimming** | Fixed Output, DALI Dimming, Switch Dimming, DSI Dimming |
| **Emergency** | Not Required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System |
| **Sensor** | Not Required, PIR, Microwave |

### Product Code: VTR-SUS