

LED UK

Ring Plus

The Ring Plus LED is a large area circular luminaire with a holo centre. The diffuser wraps around the external diameter to create a striking appearance. The fitting is available in diameters of 600mm, 900mm, 1200mm, 1500mm & 1800mm. The Ring Plus can also be surface or suspended. The body is made from roll formed aluminium and the diffuser is constructed from opal polycarbonate. Other custom sizes are available on request.


- Roll formed aluminium body
- Polycarbonate diffuser
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span

General

Dimensions	Ø600 x 250mm Ø900 x 250mm Ø1200 x 250mm Ø1500 x 250mm Ø1800 x 250mm
Weight	9.5 kg 11.7 kg 13.9 kg 16.1 kg 18.3 kg
Installation	Ceiling Surface Ceiling Suspended
Voltage	90-250Vac 50/60Hz
Certification	CE, ROHS
Warranty	3 Years

Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	43.2 W 57.6 W 86.4 W 110.4 W 153.6 W
Exit Lumens	3,500 lm 4,564 lm 6,742 lm 8,525 lm 11,446 lm
Efficiency	81.0 ll/cW 79.2 ll/cW 78.0 ll/cW 77.2 ll/cW

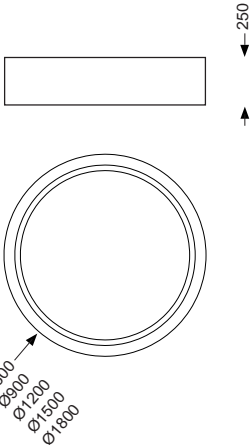

LEDUK

Ring Plus

	74.5 l/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

Available options

Size	Ø600mm (45W), Ø900mm (60W), Ø1200mm (85W), Ø1500mm (110W), Ø1800mm (150W)
Colour Temperature	3000K, 4000K, 6000K
Mounting Option	Surface, Suspended
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming

Product Code: RNG-P