

LED UK


Vista 600

Vista 600 is a 600 x 600 side lit LED Modular with opal diffuser. The luminaire is designed for either lift and tilt installation onto a 15mm or a 24mm Tee Grid, suspended using suspension kits or surface mounting with the use of a specially designed surface mounted frame. The Vista LED panel light is an environmentally friendly LED solution assembled from aluminium and a high efficiency PMMA diffuser which provides a uniformed, low glare and dot free distribution of light.

- High transmittant opal lens
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span
- Remote LED Driver

General

Dimensions	595 x 595 x 10mm
Weight	3.0kg
Installation	Recessed 16 or 24mm T-Grid
Voltage	85-265Vac 50/60Hz
Certification	SAA, TUV, CE, GS, CB, ERP
Warranty	5 Years
IP Rating	IP40

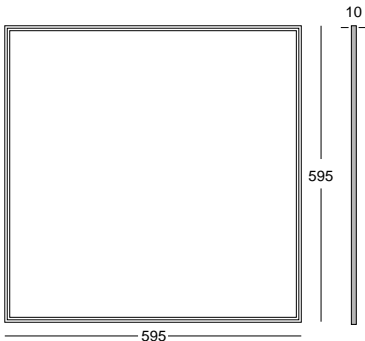

Performance

Colour Rendering	Ra>80
Longevity	50,000 hours
System Power	40.0 W
Lumens	45.0 W 4000 lm
Efficiency	4500 lm 100.00 ll/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

Available options

Wattage	40W (4000 Lm), 45W (4500 Lm)
Colour Temperature	3000K, 4000K, 6000K
Mounting Option	Lift and tilt, Suspended, Surface
Dimming	Fixed output, 1-10V Dimming, DALI Dimming, Mains Dimming, Switch Dimming
Emergency	Not required, 3 Hour Facility, 3 Hour Self Test, 3 Hour Central Test, Central Battery System

Product Code: VTA-600